

Specifications

General	
Frequency Range	UHF : 350-390MHz/400-480MHz/450-520MHz
Channel Capacity	32
Zones	2
Channel Spacing	12.5KHz/25KHz
Working Voltage	DC 7.4V (±20%)
Frequency Stability	±1.5ppm
Antenna Impedance	50Ω
Battery Average Working Time (5/5/90)	Digital 18 hours; Analog 14 hours
Weight	239g (including battery pack)
Battery Capacity	Real 1800 mAh (18650mAh Optional)
Dimensions	60.5(L)x34.5(W)x116.8(H) mm
Transmitter	
Power Output	H: 5W / M: 3W / L:1W
4FSK Modulation	12.5KHz data only: 7K60FXD 12.5KHz data and voice: 7K60FXE
FM Modulation	12.5KHz: 8K50F3E / 25KHz: 16KΦF3E
Modulation Limitation	+/-2.5KHz @ 12.5KHz +/-5KHz @ 25KHz
FM Noise	-40dB
Spurious Emission	-36 dBm≤1GHz -30 dBm≥1GHz
Adjacent Channel Power	≤-60dB
Frequency Response	+1/-3 dB
Audio Distortion	<3%
Vocoder	AMBE3000
Receiver	
Digital Sensitivity	5% BER: 0.25 μV
Analog Sensitivity	0.25 μV (12 dB SINAD)
Intermodulation	65 dB
Adjacent Channel Selectivity	60 dB
Spurious Suppression	70 dB
FM Noise	-40dB
Frequency Response	+1/-3 dB
Audio Power	500mW
Audio Distortion	3% (typical)
Conduction Radiation	-36dBm
Environmental Specifications	
Working Temperature	-20℃ -+60℃
Storage Temperature	-30℃ -+85℃
Shock & Vibration	MIL-STD-810C/D/E/F

BelFone reserves the right to change or update the specifications without any prior notice. For more information please visit www.belfone.com



Fujian BelFone Communications Technology Co., Ltd.
 Add: A15, Huaqiao Economic Development Zone, Shuangyang,
 Luojiang, Quanzhou, Fujian, China 36200
 Tel: +86 595 28396717
 Fax: +86 595 22771635
 Email: overseas@belfone.com
 Website: www.belfone.com



To order in your local place, please contact:



BF-TD518

DMR DMR Portable

As an entry level DMR handheld two-way radio, BF-TD518 is a perfect analog replacement for small businesses. BF-TD518 delivers a basic set of digital features such as superb audio, long battery life, higher spectrum efficiency, enabling the user to experience digital communications and a smooth transition from analog to digital. This is a most cost-effective two-way radio for restaurants, hotels, shops other indoor users.

Analog/Digital Dual Modes--Smooth Transition

FEC& AMBE3000 Vocoder--Clear Audio

Longer Battery Life--More Durability

Compatible with Motorola Analog Audio Accessories Kit--Better Flexibility



www.belfone.com



BF-TD518

Commercial DMR Radios



Highlights

Digital/Analog Dual Modes

BF-TD518 gives you a smooth transition from the analog world to the digital.

A Longer Battery Life

BF-TD518 can function for longer than any conventional analog radios, meeting the battery needs of a long-day operation.

Small Size and Light Weight

BF-TD518 is small and light enough to be held easily and comfortably in a single hand. It is also very easy to operate.

Excellent Audio Quality

The FEC technology and AMBE3000 vocoder deliver a clear and crisp audio.

Private Call, Group Call And All Call (programmable)

The versatile calling functions bring more efficiency to your teamwork.

Scan/ Monitor (programmable)


At a convenient push of a button you can monitor all the conversations on your channel or you can scan conversations on different channels.

Compatible with Motorola Audio Accessories

BF-TD518 is compatible with Motorola audio accessories. So, if you already have a Motorola analog earpiece or microphone, you can pair them with BelFone BF-TD518 and go hand-free.


TDMA 2-Slot

In repeater mode this radio supports two voice calls simultaneously due to DMR two timeslots, which means two communication paths at 1 frequency with no extra costs or frequency license.

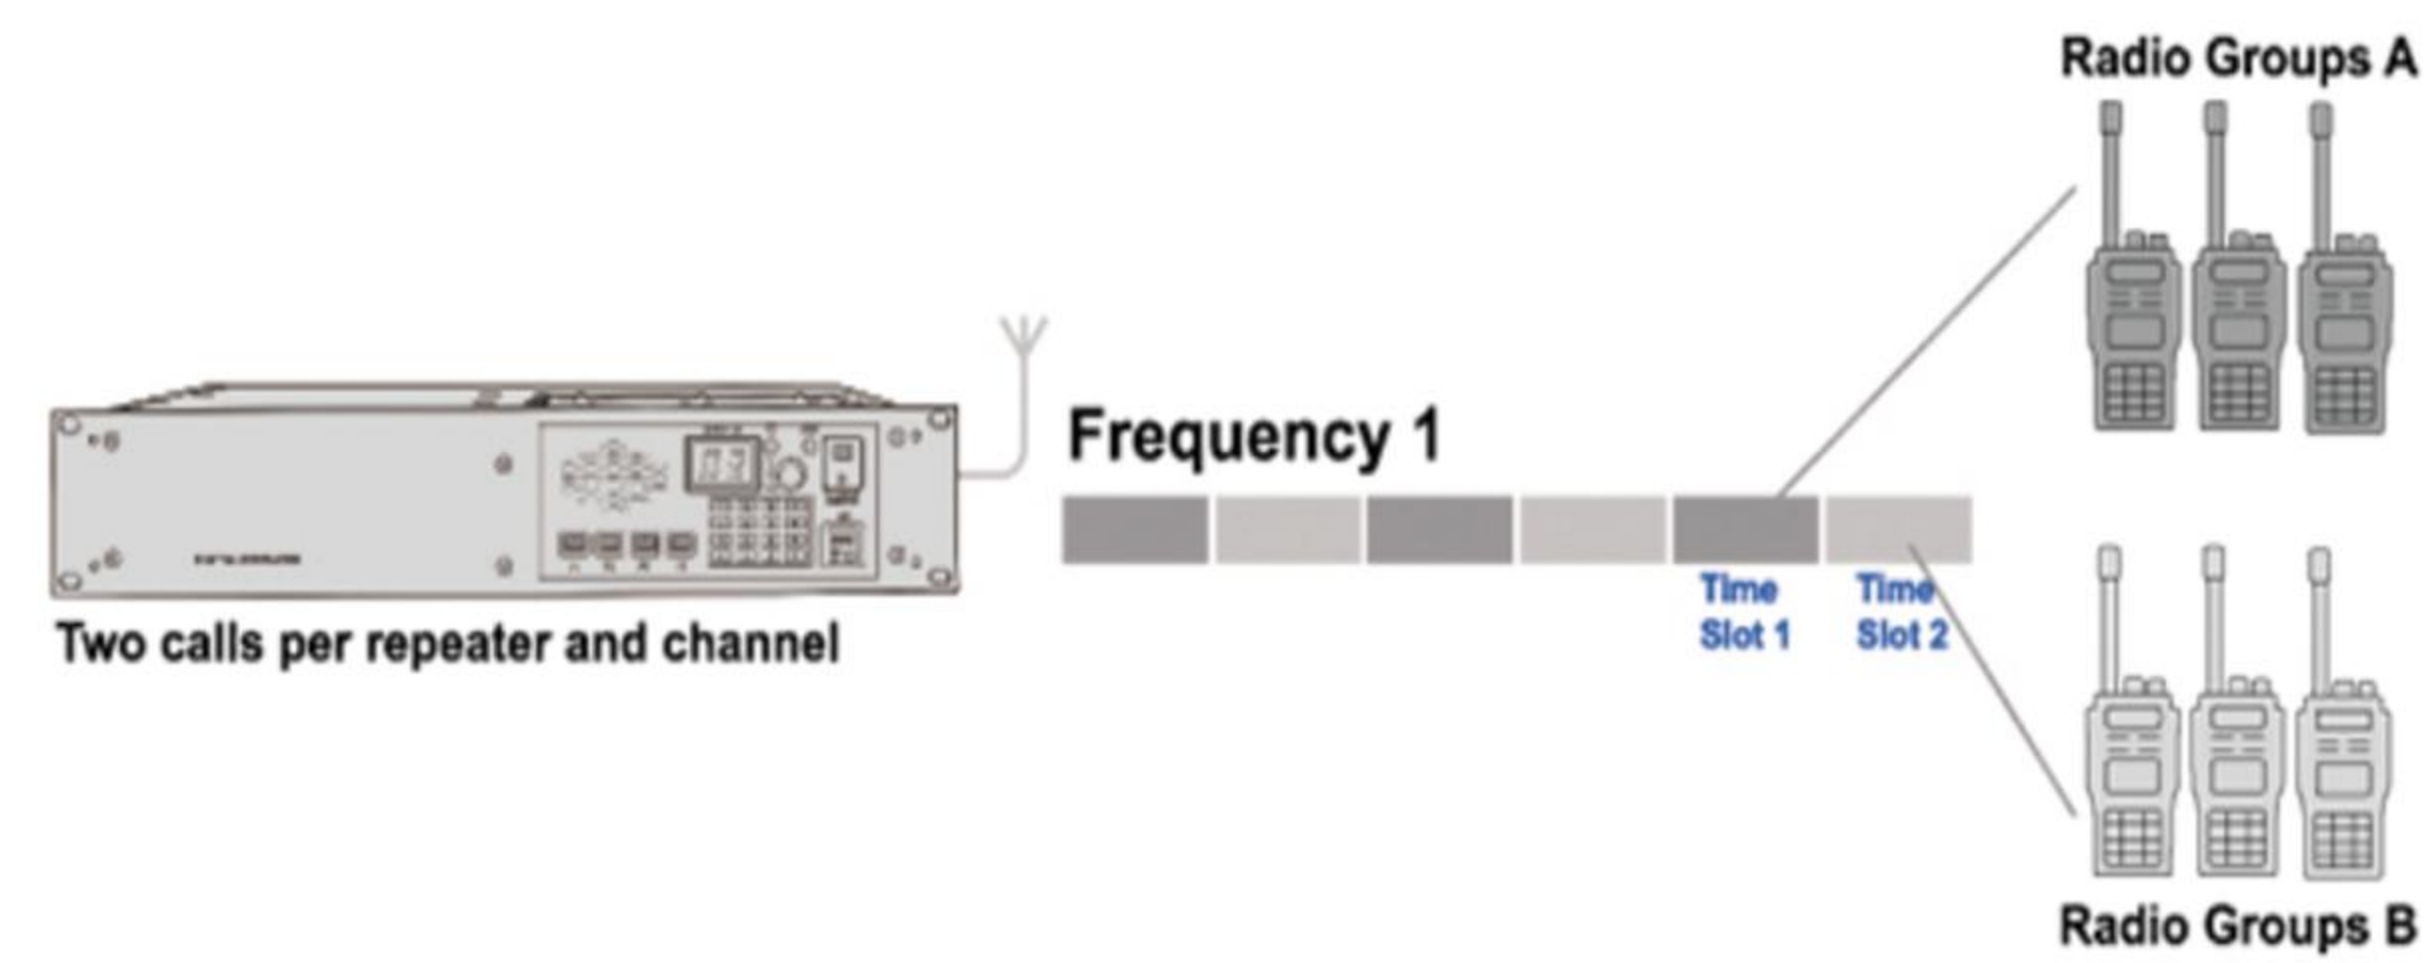

Digital/Analog Mixed Mode

Receive both analog and digital signals on a single channel and can automatically switch into the relevant mode for efficient communications.

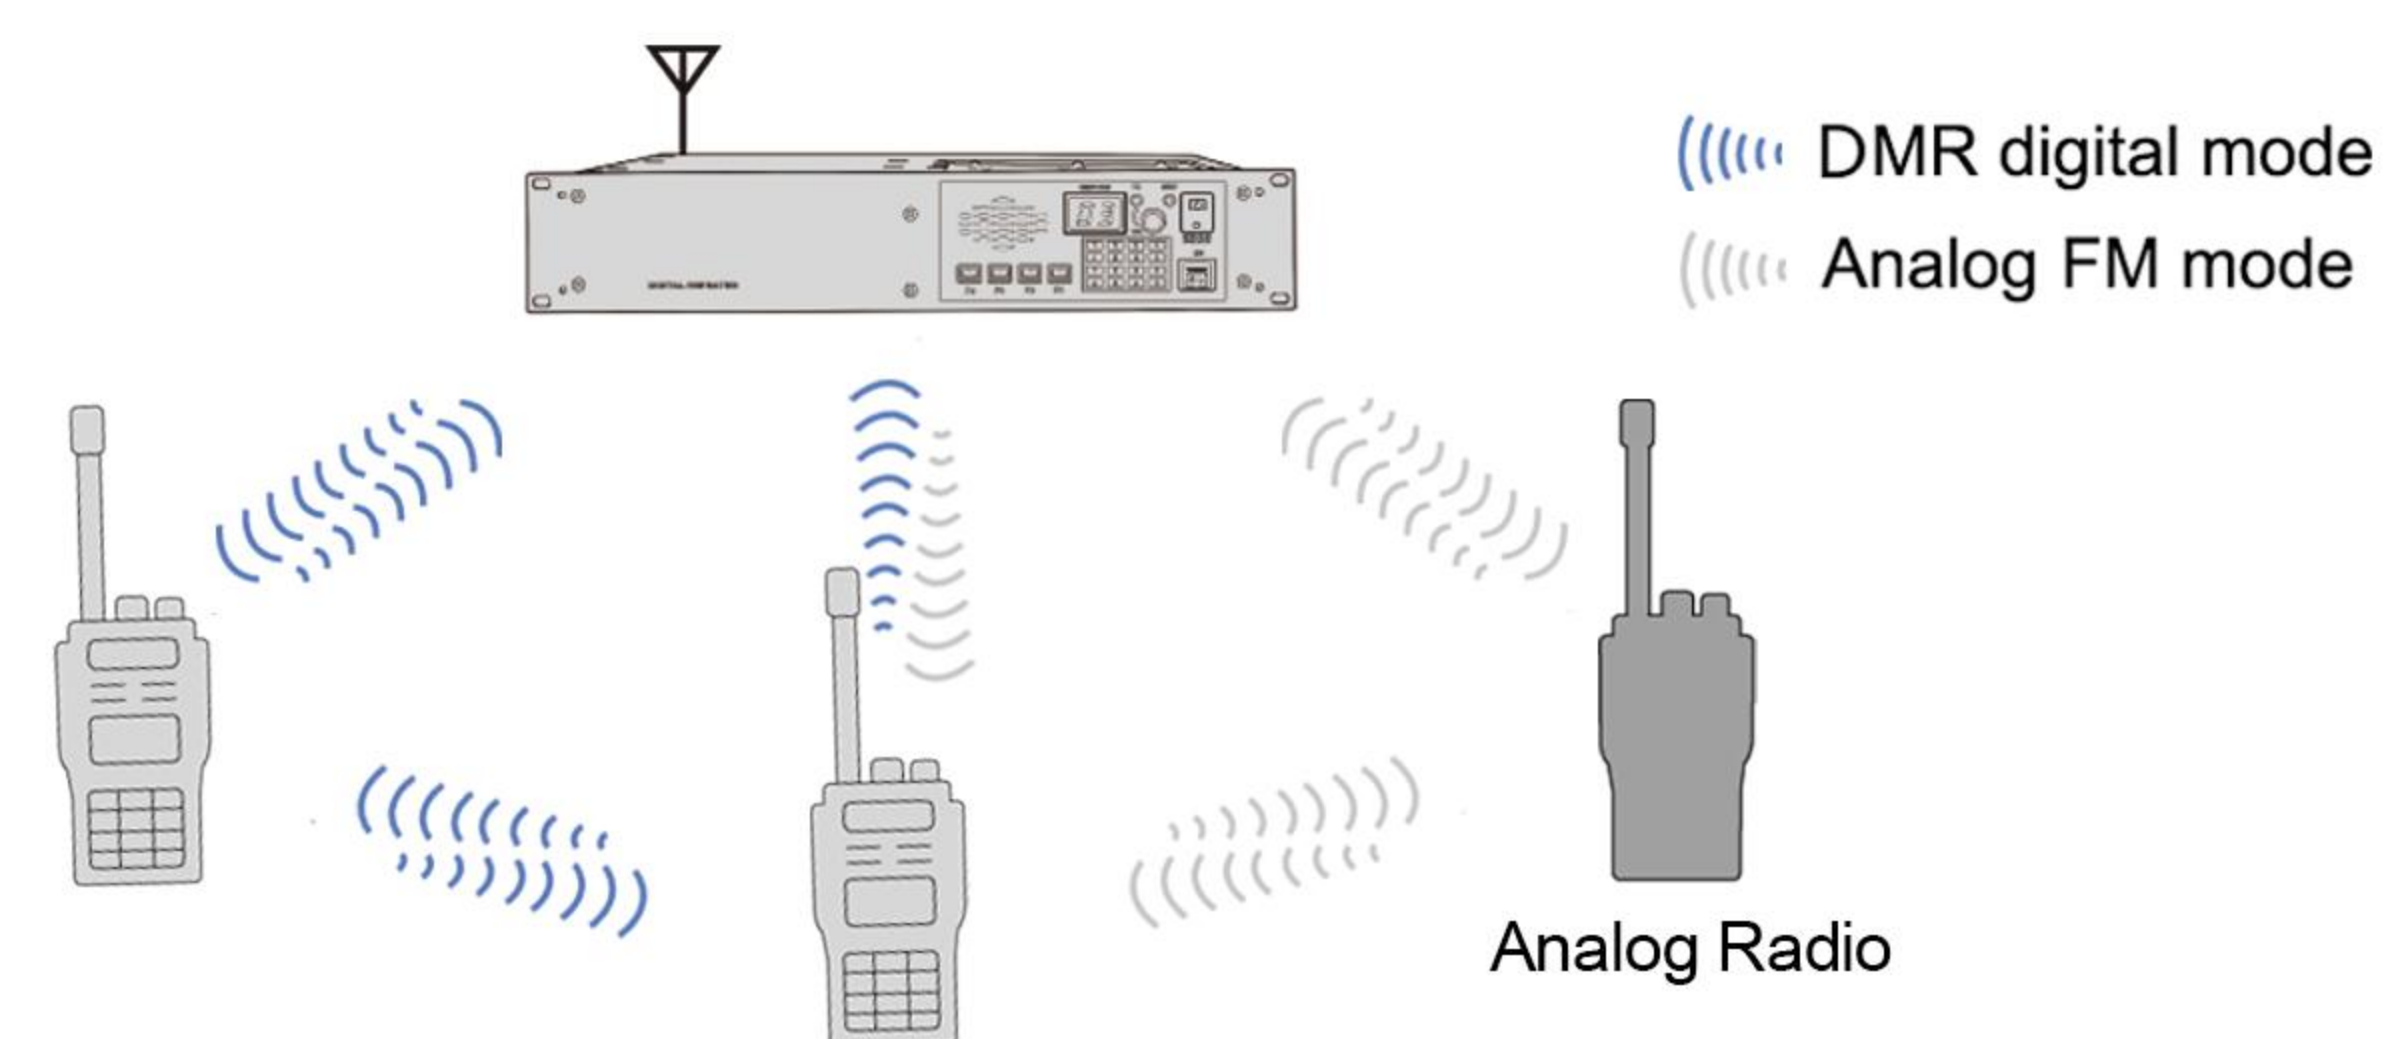

Standard Accessories



Optional Accessories

