

Specifications

General	
Frequency Range	UHF: 446. 0-446. 2MHz
Channel Capacity	32
Zones	2
Channel Spacing	12.5KHz/25KHz
Working Voltage	DC3.7V(±20%)
Frequency Stability	±1.5ppm
Antenna Impedance	50Ω
Weight	182g (including battery pack)
Battery Capacity	Real 1600mAh (Li-ion Battery)
Dimensions	54*30*101mm (L/W/H)
Transmitter	
Power Output	0.5W
4FSK Modulation	12.5KHz data only: 7K60FXD 12.5KHz data and voice: 7K60FXE
FM Modulation	12.5 KHz: 7K60FXD;
Modulation Limitation	+/-2.5KHz @12.5KHz +/-5KHz @25KHz
FM Noise	-40dB
Spurious Emission	-36 dBm≤1GHz -30 dBm≥1GHz
Adjacent Channel Power	≤-60dB
Frequency Response	+1/-3 dB
Audio Distortion	<3%
Vocoder	AMBE+2™
Receiver	
Digital Sensitivity	5% BER: 0.25 uV
Analog Sensitivity	0.25 uV (12 dB SINAD)
Intermodulation	60dB
Adjacent Channel Selectivity	60 dB
Spurious Response Rejection	70 dB
FM Noise	-40dB
Frequency Response	+1/-3 dB
Audio Power	1W
Audio Distortion	<3%
Conduction Radiation	-57dBm
Environmental Specifications	
Working Temperature	-20℃--+60℃
Storage Temperature	-30℃--+85℃
Water Proof	

BelFone reserves the right to change or update the specifications without any prior notice. For more information please visit www.belfone.com



Fujian BelFone Communications Technology Co., Ltd.
 Add: A15, Huaqiao Economic Development Zone, Shuangyang,
 Luojiang, Quanzhou, Fujian, China 36200
 Tel: +86 595 28396717
 Fax: +86 595 22771635
 Email: overseas@belfone.com
 Website: www.belfone.com



To order in your local place, please contact:



BF-TD446S

DMR DMR License Free Portable

License Free

BF-TD446S is a compact and durable digital license free handheld radio. Its long battery life guarantees great performances all the way through. Also, it delivers a consistently clear human voice without any background noise. With DMR two timeslots, BF-TD446S is the best choice for personal use, recreation, small retail and other settings that do not require wide area coverage or advanced features.

Digital/analog Dual Modes--Smooth Transition

FEC& AMBE+2™ Vocoder-- Clear Audio

Long Battery Life& USB Charging--More Convenience

DMR 2 Timeslots--Better Frequency Efficiency




www.belfone.com



BF-TD446S

DMR License Free Portable

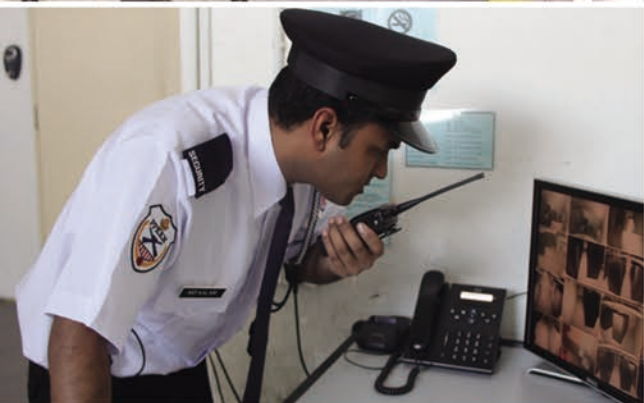

Highlights

Digital/analog Dual Modes

BF-TD446S gives you a smooth transition from the analog world to the digital.

A Longer Battery Life

BF-TD446S can function for longer than any conventional analog radios. Battery life is one less thing to worry about!

Small Size and Light Weight

BF-TD446S is small enough to be held comfortably in your hand and light enough not to be a burden.

Excellent Audio Quality

The FEC technology and AMBE+2™ vocoder deliver a clear and crisp audio.

Private Call, Group Call And All Call (programmable)

The versatile calling functions bring more efficiency to your teamwork.

Scan/ Monitor (programmable)


At a convenient push of a button you can monitor all the conversations on your channel or you can scan conversations on different channels.

Radio Priority-Based Interruption

This function enables a radio with higher level to interrupt communications between radios with lower levels, giving higher priority to radios with higher levels. This means better dispatching efficiency.

DMO Pseudo Trunk


The user can choose slot 1 or slot 2 for communications. When one slot is occupied the radio will automatically switch into the free slot. Frequency efficiency is greatly increased.

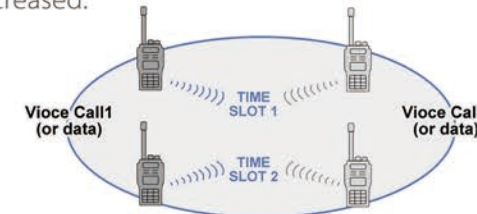

Slot 1, Slot 2 are automatically assigned to voice call 1 or voice call 2.


DMO True 2-Slot

In direct mode this radio supports two voice calls simultaneously due to DMR two timeslots, which means two communication paths at 1 frequency with no extra costs or frequency license.

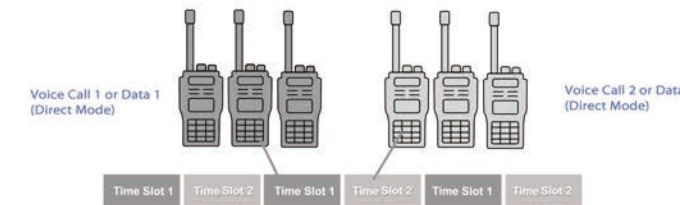

Digital/Analog Dual Modes

Receive both analog and digital signals on a single channel and can automatically switch into the needed mode for efficient communications.

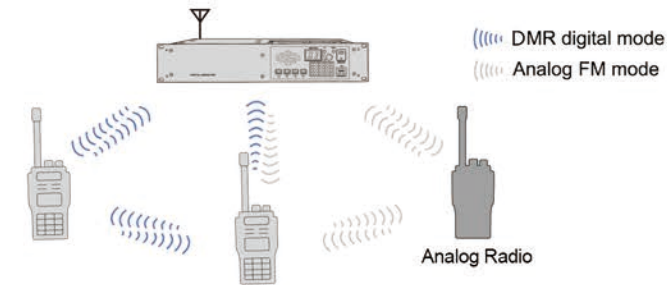

Standard Accessories



Optional Accessories

